



DECELERATORI CJAC CJAC SHOCK ABSORBERS

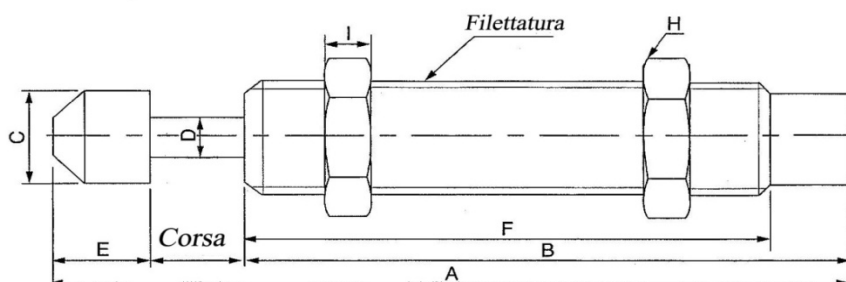

Serie AC autocompensati

Modello	Corsa mm	Filettatura	ET N/m	ETC N/H	Me Kg	Velocità massima di impatto m/sec	Temp. di lavoro °C	Peso g	A	B	C	D	E	F	H	I
AC-1412-1	12	M14 x 1,5	15	30.000	8,0	3,0	-10 +80	80	99	76	12	4	11	67	19	5
AC-1412-2	12	M14 x 1,5	15	30.000	50,0	1,5	-10 +80	80	99	76	12	4	11	67	19	5
AC-1412-3	12	M14 x 1,5	15	30.000	100,0	0,8	-10 +80	80	99	76	12	4	11	67	19	5
AC-1416-1	16	M14 x 1,5	20	35.000	10,0	3,0	-10 +80	90	122	95	12	4	11	86	19	5
AC-1416-2	16	M14 x 1,5	20	35.000	70,0	1,5	-10 +80	90	122	95	12	4	11	86	19	5
AC-1416-3	16	M14 x 1,5	20	35.000	150,0	0,8	-10 +80	90	122	95	12	4	11	86	19	5
AC-2020-1	20	M20 x1,5	40	40.000	30,0	3,5	-10 +80	215	145	110	18	6	15	101	26	7
AC-2020-2	20	M20 x1,5	40	40.000	200,0	2,0	-10 +80	215	145	110	18	6	15	101	26	7
AC-2020-3	20	M20 x1,5	40	40.000	700,0	1,0	-10 +80	215	145	110	18	6	15	101	26	7

Esempio applicativo su nastro trasportatore

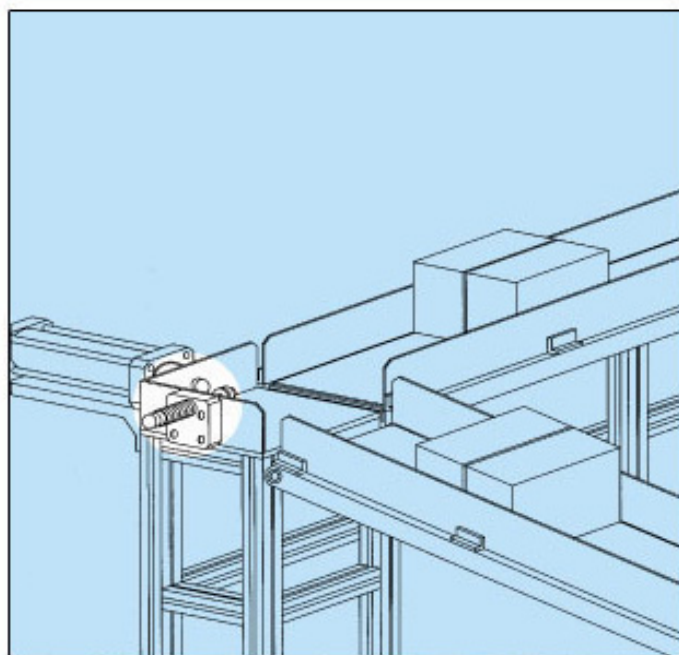

Esempio applicativo su robot

