


DECELERATORI CJAC


CJAC SHOCK ABSORBERS

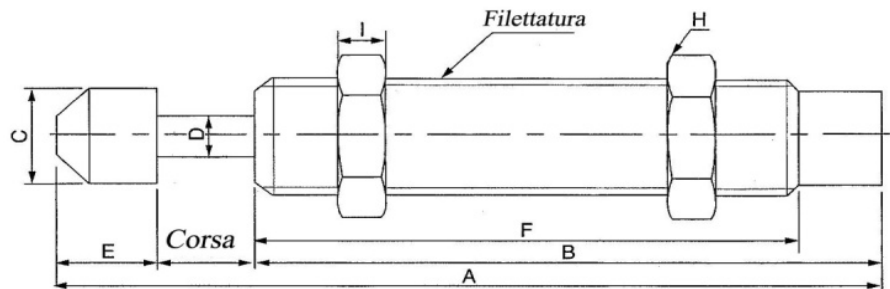

AC-2030/AC-2050

Serie AC autocompensati

Modello	Corsa mm	Filettatura	ET N/m	ETC N/H	Me Kg	Velocità massima di impatto m/sec	Temp. di lavoro °C	Peso g	A	B	C	D	E	F	G	H	I
AC-2030-1	30	M20 x1,5	50	48.000	30	3,5	-10 +80	220	155	110	18	6	15	101	-	26	7
AC-2030-2	30	M20 x1,5	50	48.000	200	2,0	-10 +80	220	155	110	18	6	15	101	-	26	7
AC-2030-3	30	M20 x1,5	50	48.000	700	1,0	-10 +80	220	155	110	18	6	15	101	-	26	7
AC-2050-1	50	M20 x1,5	60	60.000	60	3,5	-10 +80	300	232	167	18	6	15	158	-	26	7
AC-2050-2	50	M20 x1,5	60	60.000	400	2,0	-10 +80	300	232	167	18	6	15	158	-	26	7
AC-2050-3	50	M20 x1,5	60	60.000	1.200	1,0	-10 +80	300	232	167	18	6	15	158	-	26	7
ACD-2030-1	30	M20 x1,5	45	55.000	40	3,5	-10 +80	220	183	123	18	6	15	44	3	26	7
ACD-2030-2	30	M20 x1,5	45	55.000	300	2,0	-10 +80	220	183	123	18	6	15	44	3	26	7
ACD-2030-3	30	M20 x1,5	45	55.000	900	1,0	-10 +80	220	183	123	18	6	15	44	3	26	7
ACD-2035-1	35	M20 x1,5	52	63.000	40	3,5	-10 +80	210	223	123	18	5	15	42	3	26	7
ACD-2035-2	35	M20 x1,5	52	63.000	200	2,0	-10 +80	210	223	123	18	5	15	42	3	26	7
ACD-2035-3	35	M20 x1,5	52	63.000	650	1,0	-10 +80	210	223	123	18	5	15	42	3	26	7

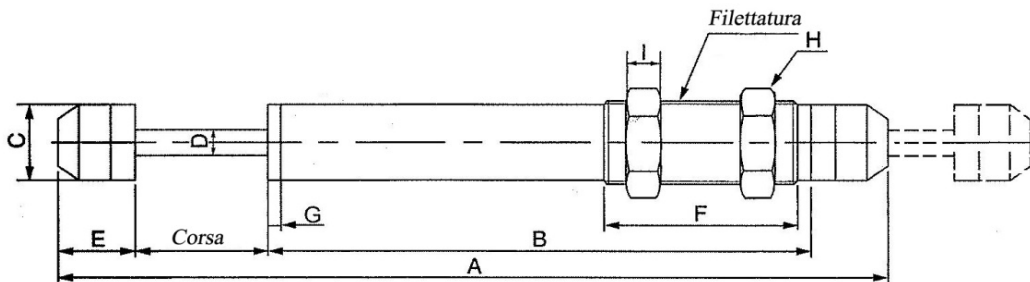

ACD-2030/ACD-2035