


ANSI B5.50 Pull Stud Type

CAT 主軸夾爪



SS : 拉刀位置(Clamping position)
 LS : 退刀位置(Release position)

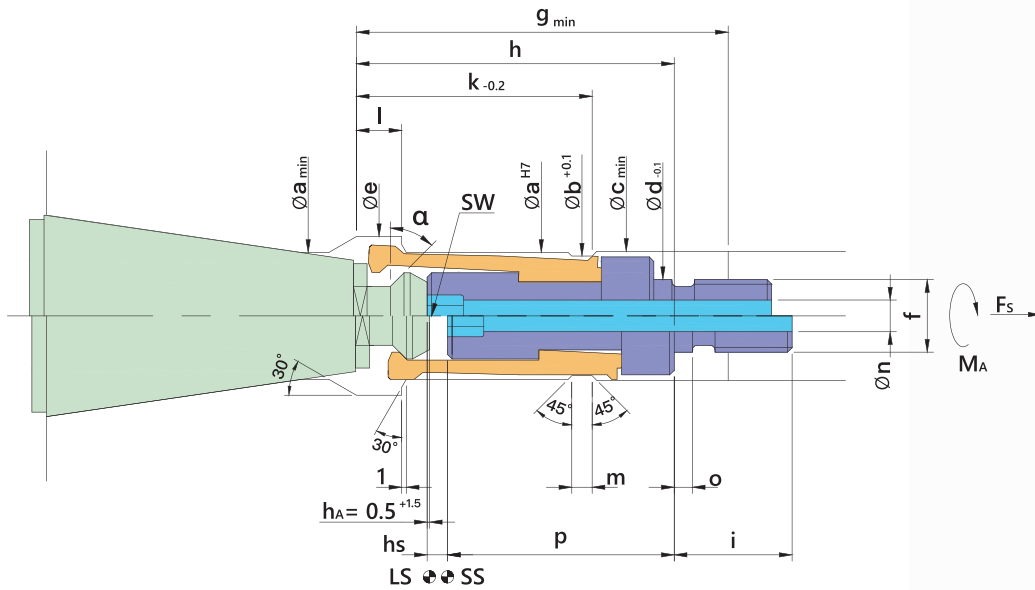

Fs max.: Clamping Force 最大拉刀力

MA max.: Tightening Torque 最大鎖緊扭矩

規格 Part No.	α $\pm 15'$	a	b	c	d	e	f	g	h	i
CAT30	45°	19	17.8	19.5	10	24	M10xP1.5	50	47	20
CAT40	45°	28	26.4	28.5	16	35	M16xP1.5	82	70	26
CAT50	45°	43	40.4	43.5	22	54	M22xP1.5	98	90	35
CAT60	45°	62	58.6	62.5	30	77	M30xP1.5	130	125	40

規格 Part No.	k	l	m	n	o	p	hs	Fs max. kN	MA max. Nm	SW mm
CAT30	37	7.5	3.5	3.0	3.0	32.7	3.0	10	30	5
CAT40	52	10.0	4.5	6.0	4.0	50.0	4.5	18	65	6
CAT50	69	16.0	5.0	9.5	5.0	58.0	7.0	35	160	10
CAT60	96	23	6.5	16	5	76.8	10.5	70	450	17