


Female Thread Type (RM series) (Compatible with ROHM series)

母牙型夾爪(相容ROHM)

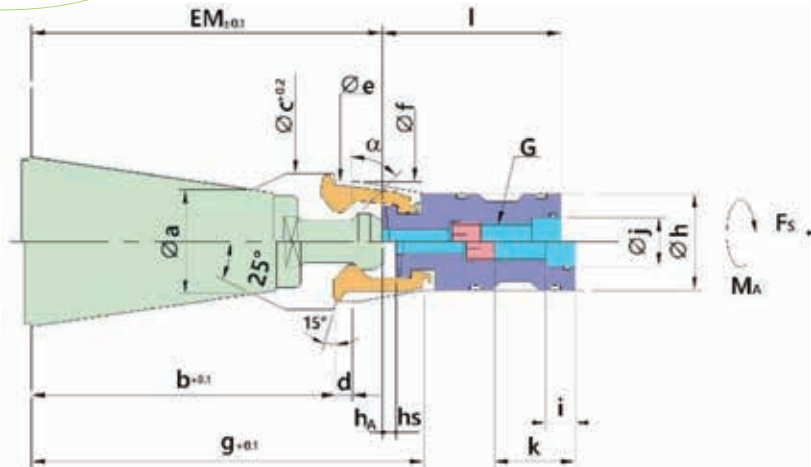

Fs max.: Clamping Force 最大拉刀力

MA max.: Tightening Torque 最大鎖緊扭矩

規格 Part No.	α $\pm 15'$	a	b	c	d	e_{G7}	f	g	h	i
BT30M45	45°	19.5	63.5	24.5	6	19.5	20	90	19	10
BT30M60	30°									
BT40M45	45°	27.6	86.5	40	7	34	34.5	117	27	11
BT40M60	30°									
BT40M90	0°									
BT50M45	45°	43	126.5	56	7	49	49.5	163	40	12
BT50M60	30°									
BT50M90	0°									
CAT30	45°	19.5	63.5	24.5	6	19.5	20	90	19	10
CAT40	45°	27.6	86.5	40	7	34	34.5	117	27	11
CAT50	45°	43	126.5	56	7	49	49.5	163	40	12
DIN30	15°	19.5	63.5	24.5	6	19.5	20	90	19	10
DIN40	15°	27.6	86.5	40	7	34	34.5	117	27	11
DIN50	15°	43	126.5	56	7	49	49.5	163	40	12

規格 Part No.	j	k	l	EM	hA	hs	G	Fs max. kN	MA max. Nm
BT30M45	12	23	56	71	0.4	4	M10xP1.5	6	30
BT30M60									
BT40M45	16	24.6	60	99.4	1	4.8	M14xP1.5	15	65
BT40M60									
BT40M90									
BT50M45	20	33.3	74.2	146	0.8	5.6	M16xP1.5	26	160
BT50M60									
BT50M90									
CAT30	12	23	-	-	-	-	M10xP1.5	6	30
CAT40	16	24.6	-	-	-	-	M14xP1.5	15	65
CAT50	20	33.3	93.7	126.5	0.8	5.6	M16xP1.5	26	160
DIN30	12	23	56	71	0.4	4	M10xP1.5	6	30
DIN40	16	24.6	66	93.4	1	4.8	M14xP1.5	15	65
DIN50	20	33.3	85.25	134.95	0.8	5.6	M16xP1.5	26	160