


Servo Insert Coupling

with split hubs

optional full stainless steel version

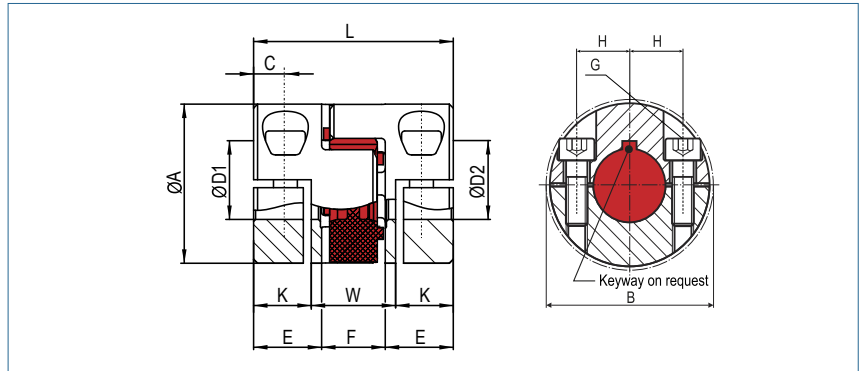

Order Code

KBE2HC - 19 - 10 - 12 - 98Sh

Type Size ØD1 (H7) ØD2 (H7) Shore-hardness

Size	Dimensions (mm)											Technical Data			
	Ø A Outer Ø	L Length	Ø D1/D2 Bore Sizes (H7) min-max	E	W	F	K	C	B	H	G Screw (ISO4762) TA (Nm)	max. speed rpm. (1/min)	Mass (per coupling) (g)	Moment of Inertia (per coupling) J (g m²)	Torque (Nm)
14	30	32	4 - 16	9.5	16.4	13	7.8	4,5	35	10.5	M4 4.5	13000	47	0.006	12.5
19	40	50	8 - 21	17	21	16	14.5	8.0	46	14.5	M6 15	10000	79	0.019	17
24	55	58	10 - 32	20	26	18	16	8	57.5	20	M6 15	7000	280	0.121	60
28	65	62	14 - 37	21	28	20	17	9	73	25	M8 40	6000	421	0.266	160
38	80	86	18 - 48	31	38	24	24	12	83.5	30	M8 40	5000	840	0.790	325
42	95	94	22 - 50	34.5	44	25	25	12,5	93.5	32	M10 84	4000	1416	1.832	450
48	105	110	22 - 57	41	50	28	30	14	105	36	M12 145	3750	1956	3.101	525

Size	Transmittable torque (Nm) depending on shaft diameter (mm)																									
	4	6	8	10	11	14	15	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45	46	48	50	55
14	10.3	15.5	20.7	25.8	28.4	36.1	38.7	41.3																		
19			47	59	65	83	89	95	107	113	119															
24				59	65	83	89	95	107	113	119	130	142	148	166	178	190									
28						123	132	141	159	167	176	194	211	220	247	264	282	308	335							
38									159	167	176	194	211	220	247	264	282	308	335	352	370	396	405	423		
42												370	404	420	471	505	538	589	639	673	706	757	774	807	841	
48												539	588	612	686	735	784	857	931	980	1029	1102	1127	1176	1225	1347

- Material** hub - aluminium
 spider element - polyurethane
- Hub** bore tolerance: H7
- Keyway** optional acc. DIN 6885
- Shore-hardness** 98 Sh A (red)
- Further spider elements and technical data are available on page 42.**