


# HSK Type HSK 主軸夾爪

# 主軸夾爪 Spindle Clamping Gripper

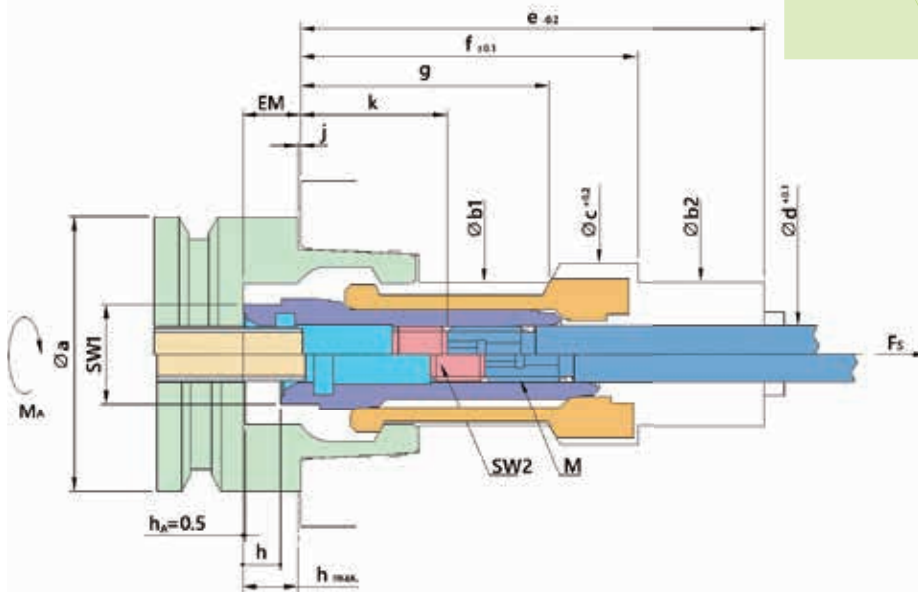

Fs max.: Clamping Force 最大拉刀力  
MA max.: Tightening Torque 最大鎖緊扭矩

規格 Part No.	a	b1 <sub>H10</sub>	b2 <sub>H6</sub>	c	d	e	f	g	M
E25	25	14	14	18	6.4	40	25.5	18.5	M6 x P0.5
A32/B40/E32	32	17	17	22.5	6.6	62.5	43	30	M6 x P1.0
A40/B50/E40/F50	40	21	21	26.5	8.6	78	58	44	M8 x P1.25
A50/B63/E50/F63	50	26	26	33.0	10.6	84	61	45	M10 x P1.5
A63/B80/E63/F80	63	34	34	41.6	14.6	94	69	52	M14 x P1.5
A80/B100	80	42	42	50	16.6	98	72	56	M16 x P1.5
A100/B125	100	53	53	63	18.4	124	93	70	M16 x P1.5
A125/B160	125	67	67	79	25.4	149	112.5	86	M24 x P1.5

規格 Part No.	h	EM <sub>±0.1</sub>	j	k	h max	Fs max. kN	MA Nm	SW1 mm	SW2 mm	最高轉速 max. RPM
E25	4.6	6.5	0.5	5.5	7.0	2.8	7	10	3	80000
A32/B40/E32	5.1	8.5	0.5	19.5	7.5	5	10	12	3	57000
A40/B50/E40/F50	5.6	8.5	0.5	27.0	8.0	6.8	15	15	4	45000
A50/B63/E50/F63	6.4	10.5	0.5	26.5	9.0	11	20	18	5	37000
A63/B80/E63/F80	7.4	10.5	0.5	31.5	10.0	18	30	24	5	29000
A80/B100	8.3	13	0.5	29	11.0	28	30	27	6	20000
A100/B125	9.15	13	0.5	34.5	12.5	45	50	36	6	15000
A125/B160	10.8	16.5	0.5	40.5	15.8	70	100	46	14	12000

註：我司亦提供黑色特殊鍍膜版本的 HSK 夾爪，其特性為較小的摩擦與較高的使用壽命。

PS : We also support black version (with special coating) of HSK type grippers, its features are minimum friction and higher life expectancy.